



Stone Rock Mini Jaw Crusher Machine Single Or Double Toggle

Our Product Introduction

for more products please visit us on mining-crushermachine.com

Basic Information

- Place of Origin: China
- Brand Name: Ascend
- Certification: ISO9001
- Model Number: PE250x400 PE400x600 PE500x750
- Minimum Order Quantity: 1 set
- Packaging Details: Wooden box or put in container
- Delivery Time: 10-20 working days
- Payment Terms: T/T, Western Union, MoneyGram, L/C
- Supply Ability: 20 Set per month



Product Specification

- Name: Mini Jaw Crusher Machine
- Motor: 15KW
- Weight: 2.3t
- Function: Crushing Stone
- Toggle: Single Or Double Toggle
- Jaw Plate Material: Mn13Cr2
- Highlight: **Rock Mini Jaw Crusher Machine, Stone Mini Jaw Crusher Machine, Double Toggle Jaw Crusher Machine**



Product Description

Stone Rock Mini Jaw Crusher Machine Single Or Double Toggle

Mini Jaw Crusher Machine is an early sand crushing equipment. Because of its simple structure, firmness, reliable work, easy maintenance and repair, and relatively low production and construction costs, it is still widely used in metallurgy, chemical industry and building materials. Industrial departments such as electric power and transportation are used to crush coarse, medium and fine crushed various ores and rocks.




Mini Jaw Crusher Machine advantages

- 1.Simple structure ensures the crushing machine is not easy to break down.
- 2.Easy operation, which makes the crusher can be operated by common people.
- 3.High crushing ratio. Large stone lump can be quickly crushed into small particles.
- 4.Energy saving. The jaw crusher power amount is consumed less than other type of crushers.



Jaw crusher overview

Motor drives V-belt and belt pulley to make moving jaw do periodic motion by eccentric shaft. Moving jaw moves upwards to the fixed jaw when angle between toggle plate and moving jaw increases, so materials are crushed in this process.

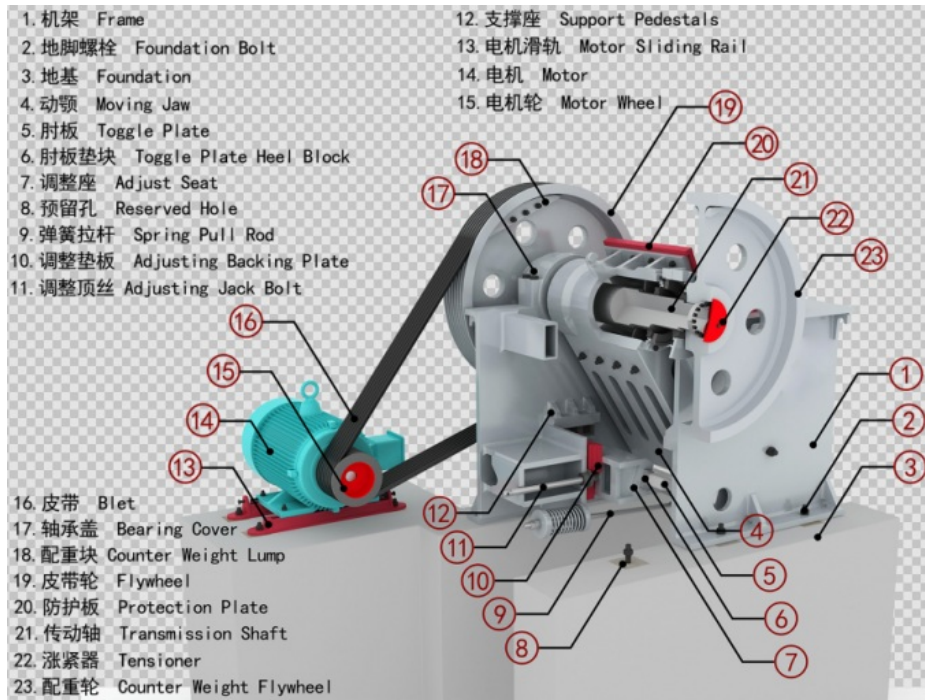

Jaw crusher spare parts



Fly wheel

tooth-shape plate

Eccentric shaft

Jaw plate assembly




Jaw crusher specifications


Model	Feed opening size (mm)	Max feed size(m m)	Adjustable range (mm)	Capacity (t/h)	Eccentric shaft rotary speed (r/min)	Motor power (kw)	Total weight (t)	Overall dimensions (L*W*H)(mm)
PE-150×250	150×250	125	10-40	1-3	250	5.5	0.8	720×660×850
PE-200×300	200×300	180	15-50	2-6	260	7.5	1.2	910×750×990
PE-200×350	200×350	180	18-70	3-10	260	11	1.5	1000×870×990
PE-250×400	250×400	210	20-60	5-20	300	15	2.8	1300×1090×1270
PE-400×600	400×600	340	40-100	16-60	275	30	7	1730×1730×1630
PE-500×750	500×750	425	50-100	40-110	275	55	12	1980×2080×1870
PE-600×750	600×750	500	150-200	80-240	275	55	15.8	2070×2000×1920
PE-600×900	600×900	500	65-160	50-180	250	55	17	2190×2206×2300
PE-750×1060	750×1060	630	80-140	110-320	250	90-110	29	2660×2430×2800
PE-800×1060	800×1060	640	160-220	130-330	250	110	29.8	2710×2430×2800
PE-830×1060	830×1060	650	160-220	150-336	250	110	30.7	2740×2430×2800
PE-870×1060	870×1060	660	200-260	190-336	250	110	31.5	2810×2430×2800

PE-900×1060	900×1060	685	230-290	230-390	250	110	33	2870×2420×2940
PE-900×1200	900×1200	750	95-165	220-450	200	110	52	3380×2870×3330
PE-1000×1200	1000×1200	850	195-265	315-500	200	110	55	3480×2876×3330
PE-1200×1500	1200×1500	1020	150-300	400-800	180	160	100.9	4200×3300×3500
PEX-150×750	150×750	120	18-48	8-25	320	15	3.8	1200×1530×1060
PEX-250×750	250×750	210	25-60	13-35	330	30	5.5	1380×1750×1540
PEX-250×1000	250×1000	210	25-60	16-52	330	30	7	1560×1950×1390
PEX-250×1200	250×1200	210	25-60	20-61	330	37	9.7	2140×1660×1500
PEX-300×1300	300×1300	250	20-90	16-105	300	55	15.6	2720×1950×1600

ASCEND Henan Ascend Machinery Equipment Co., Ltd.

 +86 18221130967

 wilson_ascendme@163.com

 mining-crushermachine.com

Shenglong block, high tech zone, Zhengzhou, China